

LIGHT ASSEMBLIES [230Vac ANGULAR LUMINAIRE RANGE]

EWEB 2270




DESCRIPTION:

The main body is of Aluminium, and because it's an extruded part the length can be specified by the client. The unit also offers a variety of Wattages available. These lights are very efficient and supply a large amount of light for the minimum of current requirements. The units are equipped with soft starting ballasts which greatly increases lamp life.

FEATURES:

- Length According To Client Specification
- Over Voltage Protection
- Voltage Surge Protection
- Current Surge Protection
- Reverse Polarity Protection
- Option For External Dimming Function
- Option For PIC controlled Dimming

OUTLINE DIMENSIONS (in millimeters):

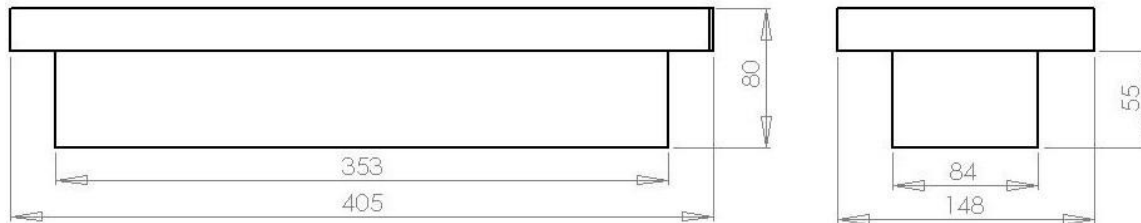

SPECIFICATION SHEET:

| PRODUCT | INPUT VOLTAGE | INVERTER | LAMP INCLUDED | DIMENSIONS (L x W x H)mm |
|-----------------------------|-----------------|-------------------|---------------|--------------------------|
| LUMINAIRE 230Vac 18W STD | 160Vac - 260Vac | 230Vac 18/24W STD | YES - PL-L | 405-1305 x 148 x 80 |
| LUMINAIRE 230Vac 24W STD | 160Vac - 260Vac | 230Vac 18/24W STD | YES - PL-L | |
| LUMINAIRE 230Vac 24W DIMMER | 160Vac - 260Vac | 230Vac 18/24W DIM | YES - PL-L | |
| LUMINAIRE 230Vac 18W STD | 160Vac - 260Vac | 230Vac 18/24W STD | YES - TL'D | |
| LUMINAIRE 230Vac 55W STD | 160Vac - 260Vac | 230Vac 55W STD | YES - PL-L | |
| LUMINAIRE 230Vac 36W STD | 160Vac - 260Vac | 230Vac 36W STD | YES - TL'D | |