

LIGHT ASSEMBLIES [*Electro-flo lights*]

EWEB 2900




DESCRIPTION:

This unit is of polycarbonate material and has an IP rating of 65. This unit houses a 55W ballast and fluorescent tube. The light assembly is available in a 110Vdc and 230Vac module.

FEATURES:

- Under voltage Protection
- Over voltage Protection
- Reverse Polarity Protection
- Voltage Surge Protection
- Current Surge Protection
- Emergency Light Module Available

OUTLINE DIMENSIONS (in millimetres):

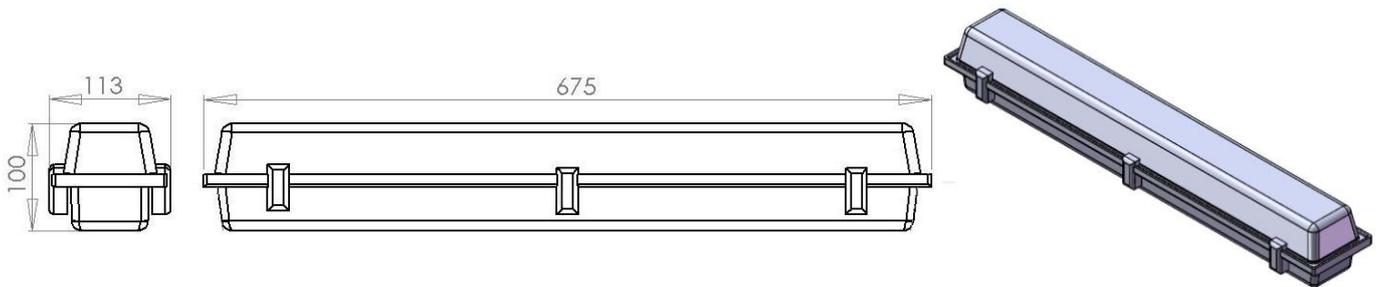

SPECIFICATION SHEET:

PRODUCT	INPUT VOLTAGE	INVERTER	MASS	DIMENSIONS L x W x H mm
ELECTRO-FLO (MACHINE ROOM LIGHT)	110Vdc	55W STD	5Kg	675 x 113 x 100
ELECTRO-FLO (GW80001)	110Vdc	55W STD		
ELECTRO-FLO (MACHINE ROOM LIGHT)	230Vac	55W STD		
ELECTRO-FLO (MACHINE ROOM LIGHT) + EMG	230Vac	55W STD		